

## FOUR NEEDLE LOCKSTITCH MACHINE


**FOUR NEEDLES**

# MODEL 4214P

## Four Needle Lockstitch Machine with Puller Feed

Featuring:

- Parallel 4 row lockstitch seamer
- Fitted with puller feed for even feeding and sewing of heavy weight materials
- Long (38.1mm) maximum needle distance allows for greater flexibility
- Built-in Puller

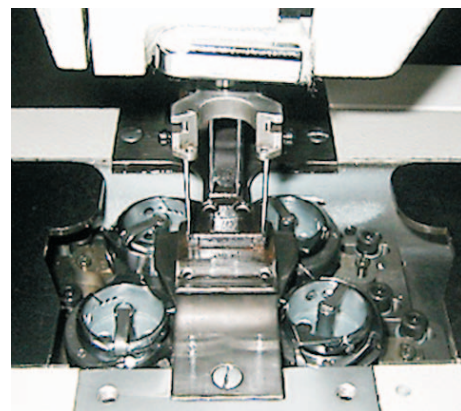

### SPECIFICATIONS

Speed, Max. (S.P.M.)	2500 *
Stitch Length, Max.	7.1 s.p.i. (3.6mm)
Presser foot lift:	9.6 mm
Needle:	7 x 3 (DYx3)
Needle distances:	
Standard:	6.4 mm - 8 mm - 6.4 mm
Minimum:	6.4 mm
Max. distance between outer needles:	38.1 mm
Standard available gauges:	1/4"-1/4"-1/4", 1/4"-5/16"-1/4", 1/4"-3/8"-1/4"

\* Speed depends on materials, operation and thread

### APPLICATIONS

- The 4214P four needle lockstitch machine is capable of lockstitching in 4 rows simultaneously and most suitable for multiple seaming (reinforcing) areas of such garments as corset stripping, blanket binding, light weight tents and parachutes, etc. The 4214P is your most efficient machine for quickly and evenly reinforcing areas that require strength.
- The Puller feeder, for sewing heavy weight materials is very effective in achieving positive feeding of heavy and difficult materials. It gives you the ability to make uniform seams without a struggle.