

EXTRA HEAVY DUTY SPECIALTY MACHINES

Model 733R-5



EXTRA HEAVY DUTY, LONG ARM
SINGLE NEEDLE, DROP FEED
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE
With Extra Large, Long-beak
Oscillating Shuttle Hook And Bobbin
Extra High Foot Lift- (1¼")
Two Row Feeder,
Reverse Feed

Speed, Max. (S.P.M.)*	550
Clearance Under Foot	1 1/4" (25.4mm)
Needle Bar Stroke	2 3/32" (53 mm)
Stitch Length, Max.	2 s.p.i. (13 mm)
Needle	1000 or 1000H



Model 733R-2

Speed, Max. (S.P.M.)*	700
Clearance Under Foot	1¼" (32mm)
Needle Bar Stroke	2 -3/32" (53 mm)
Stitch Length, Max.	2 s.p.i. (13 mm)
Needle	1000 or 1000H
Stitch Type	301
Work Space	16 ¼" (413 mm)
Weight	231 lbs. (105 kg.)

EXTRA HIGH FOOT LIFT- 1¼" (32 mm)


EXTRA HEAVY DUTY, LONG ARM
SINGLE NEEDLE, DROP FEED,
ALTERNATING PRESSER FEET
LOCKSTITCH MACHINE
with EXTRA LARGE, LONG-BEAK,
OSCILLATING SHUTTLE HOOK AND BOBBIN
REVERSE FEED

Speed, Max. (S.P.M.)*	550
Clearance Under Foot	1¼" (32mm)
Needle Bar Stroke	2 -19/32" (66 mm)
Stitch Length, Max.	2 s.p.i. (13 mm)
Needle	1000 or 1000H
Stitch Type	301
Work Space	16 ¼" (413 mm)
Weight	231 lbs. (105 kg.)

Model 733R-4



- Synchronized upper and lower feeding mechanism assures uniform stitching
- Steel insert for take-up hinge
- Reverse stitching, Stitch regulator and Presser foot lift can be hand or foot operated
- Two stitches to the inch

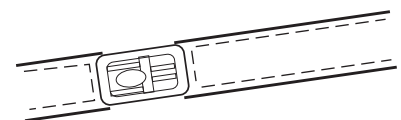

Also available: Model 733-PRO: Computer Controlled Extra Heavy Duty, Long Arm Programmable Tacker (Lockstitch Machine) with Extra Large, Long-Beak Oscillating Shuttle, Hook And Bobbin

* Speed depends on materials, thread and operation
Specifications subject to change without notice.

Note: **CentralLube®**, registered semi-automatic lubrication system.
©2005 Consew -805- Printed in USA