

COVERSTITCH MACHINES




MODEL 697VF

HIGH SPEED, FLAT BED, TOP & BOTTOM COVERSTITCH MACHINE



FEATURES

- Automatic and filtered lubricating system, enables machine to run at max. sewing speed of up to 6,000 s.p.m.
- Micro-adjustable and lever-adjustable differential feeding ratio.
- Easy to operate, push-button stitch length regulator.
- Silicone based needle cooling system and thread lubricating system.
- Works with many different kinds of attachments.

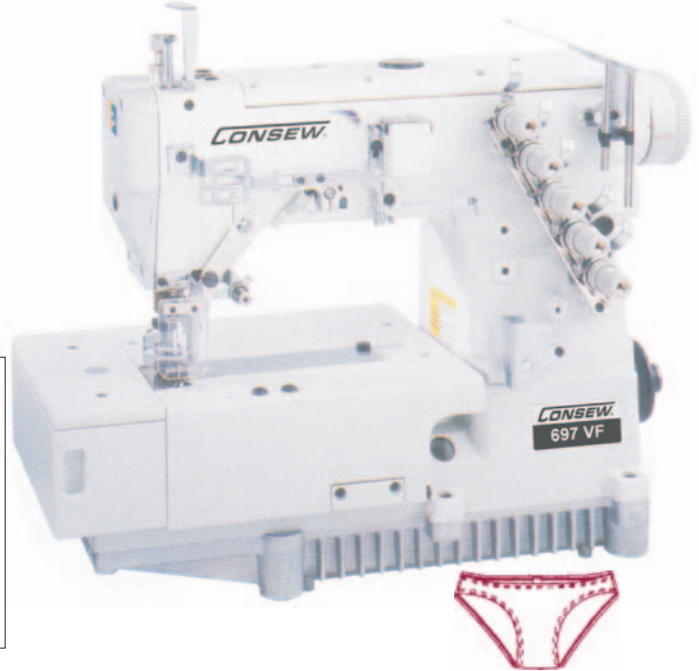

SPECIFICATIONS

MAX. SEWING SPEED:	6,000 S.P.M.
LIFT OF PRESSER FOOT:	7.0 mm
DIFFERENTIAL RATIO:	1 : 0.7 ~ 1 : 2.0
STANDARD NEEDLE GA.:	Comes with 3-needle, 5.6 mm (Optional Needle Gauges available)
2 Needles:	3.2, 4.0, 4.8, 5.6, 6.4 mm
3 Needles:	5.6, 6.4 mm
STITCH LENGTH:	1.4 ~ 3.6 mm
NEEDLE BAR STROKE:	31 mm
NEEDLE SYSTEM:	UY128GAS

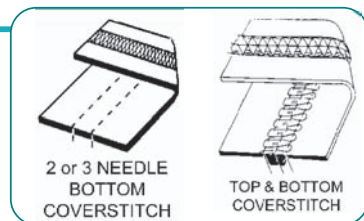

MODEL 697CVF

HIGH SPEED, CYLINDER BED TOP & BOTTOM COVERSTITCH MACHINE

FEATURES

- Automatic and filtered lubricating system, enables machine to run at max. sewing speed of up to 6,000 s.p.m.
- Micro-adjustable and lever-adjustable differential feeding ratio.
- Easy to operate, push-button stitch length regulator.
- Silicone based needle cooling system and thread lubricating system.
- Works with many different kinds of attachments.

SPECIFICATIONS



MAX. SEWING SPEED:	6,000 S.P.M.
LIFT OF PRESSER FOOT:	7.0 mm
DIFFERENTIAL RATIO:	1 : 0.3 ~ 1 : 2.9
STANDARD NEEDLE GA.:	Comes with 3-needle, 5.6 mm (Optional Needle Gauges available)
2 Needles:	3.2, 4.0, 4.8, 5.6, 6.4 mm
3 Needles:	5.6, 6.4 mm
STITCH LENGTH:	1.4 ~ 3.6 mm
NEEDLE BAR STROKE:	31 mm
NEEDLE SYSTEM:	UY128GAS



* Speed depends on materials, thread and operation
Specifications subject to change without notice.

Note: **CentraLube®**, registered semi-automatic lubrication system.
©2004 Consew -404- Printed in USA