

OVERLOCK MACHINES

"EX" Series High-Speed Overlock Machines


With Fully Automatic Lubrication • Differential Feed with Micrometric Adjustment • Pushbutton Stitch Regulator

- Speed, Max. up to 8500 s.p.m. (depending on materials, thread & operation)
- Fully automated lubrication with visual flow controls
- Lubricating oil continuously filtered by replaceable filter.
- External cooling of oil supply • Push-button stitch regulator
- Differential feed with micrometric adjustment for shirring and stretching. Ratio up to 4 to 1
- Intermitent action possible • Standard type B-29 needles

* Needle Gauge Note: Comes with standard gauge but more gauges are available.

Model 693EX

For overlock sewing of light to heavyweight materials




SPECIFICATIONS

Max. Sewing Speed:	8,500 S.P.M.	Overedging Width:	3, 4, 5 mm
Presser Foot Lift:	5.0 mm	Stitch Length, Max:	3.8 mm
Differential Ratio:	1 : 0.7 ~ 1 : 2	Number of Threads:	2 / 3
Needles:	1		

Model 694EX

For overlock sewing of medium to heavyweight materials

Mock Safety Stitch - Great for narrow overedging widths. Suitable for seaming sides and joining




SPECIFICATIONS

Max. Sewing Speed:	7,500 S.P.M.	Overedging Width:	3, 4, 5 mm
Presser Foot Lift:	5.5 mm	Stitch Length, Max:	3.8 mm
Differential Ratio:	1 : 0.7 ~ 1 : 2	Number of Threads:	4
Needle Gauge (2) *:	2 mm standard		

Model 695EX

For overlock sewing of medium to heavyweight materials

True Safety Stitch - suitable for sewing products such as men's, ladies' and children's wear, especially coats for children and women.

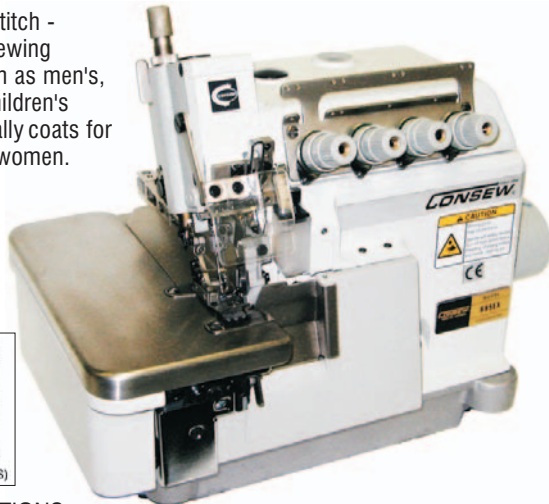

SPECIFICATIONS

Max. Sewing Speed:	7,500 S.P.M.	Overedging Width:	5, 6 mm
Presser Foot Lift:	5.0 mm	Stitch Length, Max:	3.8 mm
Differential Ratio:	1 : 0.7 ~ 1 : 2	Number of Threads:	4 / 5
Needle Gauge (2) *:	5 mm standard		

Model 695HEX


For Extra Heavy Weight Materials

- Uses an extra high-throw upper looper, tractor foot and feed dog for sewing extra heavy-weight materials
- True safety stitch

ULTRA HIGH FOOT LIFT



Note: 695EX and HEX have a 5th thread tensioner on the side



SPECIFICATIONS

Max. Sewing Speed:	6,000 S.P.M.	Overedging Width:	5, 6, 7 mm
Presser Foot Lift:	7.0 mm	Stitch Length, Max:	5 mm
Differential Ratio:	1 : 0.8 ~ 1 : 1.5	Number of Threads:	4 / 5
Needle Gauge (2) *:	5 mm standard		

Call for information on other stitch patterns:



* Speed depends on materials, thread and operation
Specifications subject to change without notice.

Note: **CentraLube®**, registered semi-automatic lubrication system.