

ZIG-ZAG MACHINES

SINGLE NEEDLE, DROP FEED, **ZIG-ZAG**, LOCKSTITCH MACHINES

MODEL CN2053R-1

Horizontal Axis Transverse Rotary Hook Reverse Feed
Combination Zig-Zag And Straight Stitcher

- Built-In Bobbin Winder
- Needle Position Adjustment
- Metal Gears (Hardened Steel)
- Adjustable Reverse Stitch Length



Speed, Max. (S.P.M.) *	2500
Clearance Under Foot	1/4" (6mm)
Needle Bar Stroke	1 1/4" (31.5 mm)
Stitch Length, Max.	5 s.p.i. (5 mm)
Needle	135 x 5
Stitch Width Max.	3/8" (9 mm)
Stitch Type	304


Don't forget to order your stand, complete with motor. Comes assembled or knock-down kit.

MODEL CN2033R-1

Combination Zig-Zag/straight stitcher.



Single needle, drop feed, horizontal transverse rotary hook with reverse feed, bobbin winder, steel gears, 9mm wide zig-zag, needle position adjustment.

Max. stitch length: 5 s.p.i. (5mm)
Max. speed: 2000 S.P.M.*
Needle: 135 X 5 Stitch type: 304


For sewing light to medium heavy materials.
Suitable for attaching lace, elastic bands, bottom hemming, appliques, etc.
Optional monogramming and embroidery plate available.

MODEL CN2043R-1

- Combination Zig-Zag And Straight Stitcher
- Horizontal axis transverse rotary hook
- Wide zig-zag — 0 – 15/32 inches (0 – 12 mm)
- Dial zig-zag regulator
- Locking zig-zag width regulator
- Straight stitches when zig-zag is set to "0"
- Reverse stitching
- Metal gears (hardened steel)



Speed, Max. (S.P.M.)	2000
Clearance Under Foot	1/4" (6mm)
Needle Bar Stroke	1 15/16" (33.3 mm)
Stitch Length, Max.	5 s.p.i. (5 mm)
Needle	135 x 5
Stitch Width Max.	15/32" (12mm)



CP146R PORTABLE WALKING FOOT ZIG-ZAG

- Single Needle
- Drop Feed, Walking Foot, Zig-Zag, Lockstitch Machine with Built-in 110vac, 1/10 HP Motor
- Horizontal Oscillating Hook and Reverse.




* Optional hard carrying case available.

- For sewing medium to heavy weight fabrics that are difficult to feed.
- Elastic and other stretch materials, plus canvas, nylon, vinyl, leather, synthetics and similar materials.
- For stitching such products as boat and truck covers, tents, awnings, sails, parachutes, tarpaulins wet suits, leather, shoes, boots and similar products

Speed, Max. spm: 800*
Stitch Length, Max: 6 mm
Max. Zig-Zag Width: 5mm (13/64")
Needle Bar Stroke: 34mm
Needle: DP x 17 18-23
Net Weight: 19 kg (42 lbs)

• Use where where reinforced Zig-Zag stitch is necessary.

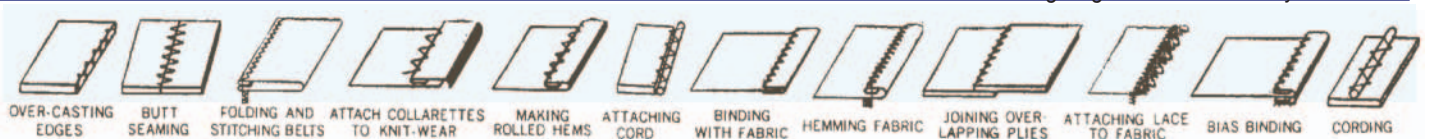

* Speed depends on materials, thread and operation
Specifications subject to change without notice.

Note: **CentraLube®**, registered semi-automatic lubrication system.
©2004 Consew -404- Printed in USA